# HFE8

# SUBMINIATURE INTERMEDIATE POWER RELAY



File No.: E134517



File No.: 40019452



File No.: CQC06017016720



## Features

- Latching types available
- High sensitive
- High switching capacity

1A,1B: 8A 250VAC; 2A, 2B,1A + 1B: 5A 250VAC

- 1 Form A,1 Form B, 2 Form A,2 Form B and 1A + 1B contact arrangement
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.2 x 11.0 x 10.4) mm

CONTACT DATA		
Contact arrangement	1A,1B	2A,2B, 1A + 1B
Contact	No gold plated: 50mΩ (at 1A 6VDC)	
resistance	Gold plated: 30mΩ (at 1A 6VDC)	
Contact material	AgNi	
Contact rating (Res. load)	8A 250VAC	5A 250VAC
	5A 30VDC	5A 30VDC
Max. switching voltage	380VAC / 125VDC	
Max. switching current	8A	5A
Max. switching power	2000VA/150W	1250VA/150W
Mechanical endurance		1 x 10 <sup>7</sup> ops
Electrical endurance		1 x 10 <sup>5</sup> ops

CHARACTERISTICS			
Insulation resistance		1000MΩ (at 500VDC)	
Between coil & contacts		3000VAC 1min	
Dielectric strength Between open con		1000VAC 1min	
Betweer	contact sets	2000VAC 1min	
Operate time (at nomi. volt.)		10ms max. (Approx. 5ms)	
Release time (at nomi. volt.)		5ms max. (Approx. 3ms)	
Set time (latching)		10ms max. (Approx. 5ms)	
Reset time (latching)		10ms max. (Approx. 4ms)	
.:	Functional	196m/s²	
Shock resistance	Destructive	980m/s²	
Vibration resistance		10Hz to 55Hz 2.0mm DA	
Humidity		5% to 85% RH	
Ambient temperature		-40°C to 70°C	
Termination		PC	
Unit weight		Approx. 4.7g	
Construction		Wash tight, Flux proofed	
	Betweer Betweer ime (at no ime (at no ime (atching) e (latching) sistance resistance remperatu on	Between coil & contacts Between open contacts Between contact sets ime (at nomi. volt.) ime (at nomi. volt.) clatching) e (latching) sistance Functional Destructive resistance emperature on	

Notes: The data shown above are initial values.	
---	--

COIL		
Coil power	Single side stable	300mW
	1 coil latching	150mW
	2 coils latching	300mW

# COIL DATA at 23°C

#### Single side stable (300mW)

enigio ciao ciable (cociniv)			
Pick-up Voltage VDC	Drop-out Voltage VDC	Coil Resistance Ω	
2.4	0.3	30 x (1±10%)	
4.0	0.5	83 x (1±10%)	
4.8	0.6	120 x (1±10%)	
7.2	0.9	270 x (1±10%)	
9.6	1.2	480 x (1±10%)	
19.2	2.4	1920 x (1±10%)	
	Pick-up Voltage VDC 2.4 4.0 4.8 7.2 9.6	Pick-up Voltage VDC         Drop-out Voltage VDC           2.4         0.3           4.0         0.5           4.8         0.6           7.2         0.9           9.6         1.2	

	1 Form A	8A 250VAC
		5A 30VDC
		1/6HP 250VAC
UL&CUL 2 Form		5A 250VAC
	2 Form A	5A 30VDC
		1/10HP 250VAC
	1A + 1B	5A 250VAC
		5A 30VDC
		1/6HP 250VAC
		8A 250VAC
VDE 1 Form A 2 Form A	5A 30VDC	
		5A 250VAC cosø =0.4
	2 Form A	5A 250VAC
		5A 30VDC

**SAFETY APPROVAL RATINGS** 

**Notes:** Only some typical ratings are listed above. If more details are required, please contact us.

1A + 1B



ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

3A 250VAC cosø =0.4


## COIL DATA at 23°C

## 1 coil latching (150mW)

# 2 coils latching (300mW)

Nominal Voltage VDC	Set / Reset Voltage VDC	Coil Resistance Ω
3	2.4	60 x (1±10%)
5	4.0	167 x (1±10%)
6	4.8	240 x (1±10%)
9	7.2	540 x (1±10%)
12	9.6	960 x (1±10%)
24	19.2	3840 x (1±10%)

Nominal Voltage VDC	Set / Reset Voltage VDC	Coil Resistance Ω
3	2.4	(30+30) x (1±10%)
5	4.0	(83+83) x (1±10%)
6	4.8	(120+120) x (1±10%)
9	7.2	(270+270) x (1±10%)
12	9.6	(480+480) x (1±10%)
24	19.2	(1920+1920) x (1±10%)

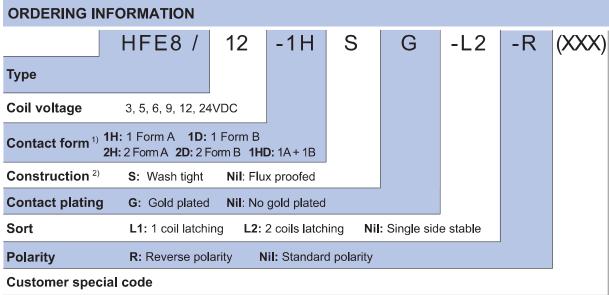

Notes: 1) H means that relay is on the "reset" status when leaving factory; D means that relay is on the "set" status when leaving factory.

2) Under the ambience with dangerous gas like H<sub>2</sub>S, SO<sub>2</sub> or NO<sub>2</sub>, wash tight type is recommended; Please test the relay in real applications.


## **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**


Unit: mm


#### **Outline Dimensions**

Single side stable & 1 coil latching

2 coils latching

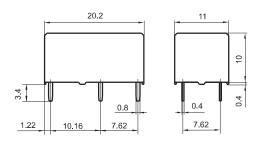





# **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**


Unit: mm

## **PCB** Layout

(Bottom view)

## Single side stable & 1 coil latching

#### 2 coils latching

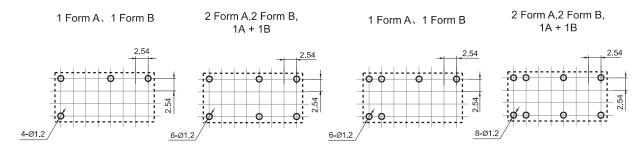



Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.


- 2) The tolerance without indicating for PCB layout is always ±0.1mm.
- 3) The width of the gridding is 2.54mm.

# Wiring Diagram (Bottom view)


## Single side stable (Standard polarity)











## 1 coil latching (Standard polarity)












## Wiring Diagram (Bottom view)

#### 2 coils latching (Standard polarity)

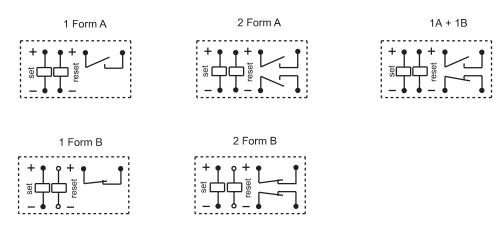

Remark: The coil polarity of Reverse polarity and Standard polarity is opposite.

#### Notice

- 1. Relay is on the "reset" or "set" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
- 2. In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage, impulse width should be 5 times more than "set" or "reset" time. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.
- 3. In order to avoid changing operate voltage, products should not be kept in strong magnetic field during transportation, storage and application.

#### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.