



AK-HK5.5/VE



**Specification**

Connector:

5.5 / 2.1mm, Female jack

Contact material: Cu alloy

Contact plating: Nickel

Insulation material: PVC, Black

Voltage rating: 12 V/ DC

Current rating: 2A

Insulation resistance: >100MΩ

Cable:


UL 2468, 24 AWG, 11/0.15BC x2c

Cable dimension: 3.6 x 1.8 mm ±0.2mm

Cable Length: 200 mm ±2mm

Insulation material: PVC, RED/BLACK

Operating temperature: -30 ~ 80°C

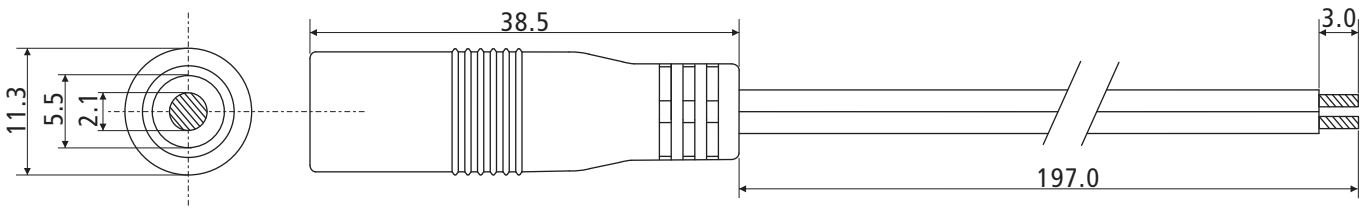

Dimension unit: mm±.02

