

LogiLink®



USB3.0 4-Port Hub

Metal Housing with Mounting Rack

Art. No.: UA0149



The USB3.0 Hub is well shielded with metallic casing, the optimum solution for an industrial use. It can be mounted below the table or on the wall, providing an organized and tidier work area. The power adapter included supplies extra power for the power-hungry USB devices. Moreover, the hub extends your USB port with 4 additional ports!

Features:

- » Compliant to USB3.0/2.0/1.1 Specification
- » Supports USB3.0 High-Speed up to 5Gbps
- » 1 x up-stream port and 4 x down-stream ports support
- » Equipped with over-current Detection & Protection
- » With external power adapter (5V/3.5A)
- » Metal Housing with mounting rack
- » LED status indicator
- » Plug & Play
- » Supports Windows XP/Vista/7/8/10

Specification:

Power Adapter	AC 100-240V, 50/60Hz, 3.5A
Input Voltage	DC 5V/0.5A (without power adapter) DC 5V/3.5A (with power adapter)
Cable Length	0.6m
Dimension	117 x 45 x 20mm
Weight	130g
Operating Temperature	-5°C~45°C
Storage Temperature	-10°C~60°C

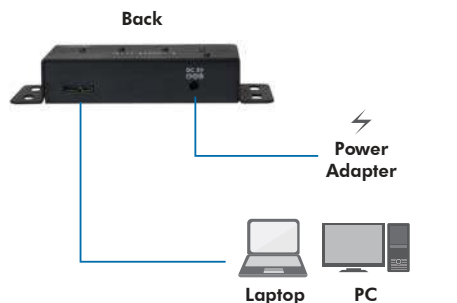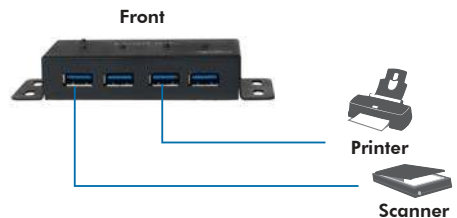

Package Contents:

- » 1 x USB3.0 4-Port Hub
- » 1 x USB3.0 Cable
- » 1 x Power Adapter (5V/3.5A)
- » 1 x User Manual

Package Informations:

- » Packing Dimension: 180 x 140 x 70mm
- » Packing Weight: 0.38kg
- » Carton Dimension: 380 x 370 x 300mm
- » Carton Q'ty: 20pcs
- » Carton Weight: 8.5kg

*The Hub must be connected to a USB 3.0-compliant host in order to function in SuperSpeed mode (5Gbps data rate). If the Hub is connected to a USB 2.0 or 1.1 compliant host, it will operate only in High-Speed, Full-Speed or Low-Speed mode (480/12/1.5 Mbps).

*The LED will only lit when USB 3.0 device is connected.



UA0149



Made in China



* The specifications and pictures are subject to change without notice.

*All trade names referenced are the registered namework of their respective owners.