

CS1782A/CS1784A




2/4-Port USB DVI Dual Link KVMP™ Switch

- The CS1782A/CS1784A USB DVI Dual Link KVMP™ Switch charts a revolutionary direction in KVM switch functionality. It combines the capabilities of a 2/4-port KVM switch with a 2-Port USB hub, while providing a DVI monitor interface and audio support. Moreover it carries advanced features, such as nVidia 3D Vision ready 120Hz 3D display support, gaming keyboard compatibility and port selection/switching using a mouse, aimed at giving you flexibility, convenience and enjoyment



Features

- 2-port DVI KVMP Switch with USB 2.0 and 7.1 Surround Sound Audio (CS1782A)
- 4-port DVI KVMP Switch with USB 2.0 and 2.1 Surround Sound Audio (CS1784A)
- One USB console controls two/four computers and two additional USB devices
- 2-port built in USB 2.0 hub fully compliant with the USB 2.0 specification
- Full bass response for high quality 7.1 channel surround sound systems (CS1782A)
- Full bass response for high quality 2.1 channel surround sound systems (CS1784A)
- Computer selection via front panel pushbuttons, hotkeys, and mouse
- Multiplatform support – Windows, Linux, Mac, and Sun*
- Independent switching of KVM, USB, and Audio focus
- DVI digital and analog monitor support – fully compliant with the DVI specifications
- Superior video quality: 1920 x 1200 @ 60Hz (Single Link); 2560 x 1600 @ 60Hz (Dual Link)
- nVidia 3D Vision Ready: Works with 120Hz LCD monitors and active shutter glasses to create a 3D environment with maximum resolution of up to 1920 x 1080
- Support widescreen resolutions
- HDCP compatible
- Video DynaSync™ – Exclusive ATEN technology that eliminates boot-up display problems and optimizes resolution when switching between ports
- Power on detection – if one of the computers is powered off, the switch will automatically switch to the next powered-on computer
- Console mouse port emulation/bypass feature that supports most mouse drivers and multifunction mice
- Console keyboard emulation/bypass feature that supports most gaming / multimedia keyboards
- Complete keyboard emulation for error-free booting
- Mac/Sun keyboard support and emulation*
- Multilingual keyboard mapping – supports English, Japanese, and French keyboards
- Auto Scan Mode for monitoring all computers
- Firmware upgradable
- * PC keyboard combinations emulate Mac/Sun keyboards
Mac/Sun keyboard work only with their own computers

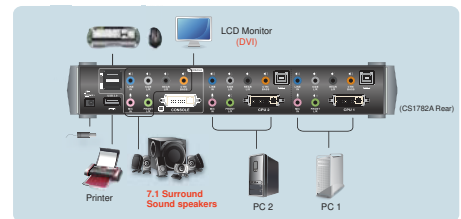

Specification

Function		CS1782A	CS1784A	
Computer Connections		2	4	
Port Selection		Front Panel Pushbuttons, Hotkeys, Mouse		
Console Ports	Keyboard	1 x USB Type A Female (Black; rear panel)		
	Video	1 x DVI-I Female (White)		
	Mouse	1 x USB Type A Female (Black; rear panel)		
	Audio	Line out	2 x Mini Stereo Jack Female (Green; 1 x front panel, 1 x rear panel)	
		Line in	1 x Mini Stereo Jack Female (Blue)	N/A
		Side Speaker out	1 x Mini Stereo Jack Female (Gray)	N/A
		Rear Speaker out	1 x Mini Stereo Jack Female (Black)	N/A
		Center / Subwoofer	1 x Mini Stereo Jack Female (Orange)	N/A
Microphone	2 x Mini Stereo Jack Female (Pink; 1 x front panel, 1 x rear panel)			
Connectors	Keyboard/ Mouse	2 x USB Type B Female (White)	4 x USB Type B Female (White)	
	Video	2 x DVI-I Female (White)	4 x DVI-I Female (White)	
	KVM Ports	Line out	2 x Mini Stereo Jack Female (Green)	4 x Mini Stereo Jack Female (Green)
		Line in	2 x Mini Stereo Jack Female (Blue)	N/A
		Side Speaker out	2 x Mini Stereo Jack Female (Gray)	N/A
		Rear Speaker out	2 x Mini Stereo Jack Female (Black)	N/A
		Center / Subwoofer	2 x Mini Stereo Jack Female (Orange)	N/A
	Microphone	2 x Mini Stereo Jack Female (Pink)		
Power	1 x DC Jack			
USB 2.0 Hub	2 x USB Type A Female (White; 1 x front panel, 1 x rear panel)			
Switches	Selected	2 x Pushbutton	4 x Pushbutton	
LEDs	On Line / Selected	2 (Orange)	4 (Orange)	
	USB Link	2 (Green)	4 (Green)	
Emulation	Keyboard / Mouse	USB		
Video	DVI Dual Link	2560 x 1600		
	DVI Single Link	1920 x 1200		
Scan Interval		1-99 secs. (5 secs. default)		
Power Consumption	DC 5.3V, 9 W	DC 5.3V, 9 W	DC 5.3V, 10 W	
	Operating Temp.	0-50°C		
Environment	Storage Temp.	-20-60°C		
	Humidity	0-80% RH, Non-condensing		
	Housing	Metal		
Physical Properties	Weight	0.90 kg	0.93 kg	
	Dimensions (L x W x H)	27.00 x 8.80 x 5.55 cm	27.00 x 8.80 x 5.55 cm	

* Product specifications and appearance are subject to change without notice.

