


Breitband-Lautsprecher WESTRA KW-200-1316

Best.Nr. 640 524


NOMINAL POWER HANDLING ACC. DIN IEC 268:	PN:	70 W
NOMINAL IMPEDANCE:	ZN:	6 Ω
VOICE COIL RESISTANCE:	RE:	5,6 $\Omega \pm 10\%$
FREE AIR RESONANT FREQUENCY	fr:	30 Hz $\pm 20\%$
FREQUENCY RANGE ACC. DIN IEC 268:		30 - 3000 Hz
VOICE COIL CARRIER MATERIAL:		ALUMINIUM
VOICE COIL DIAMETER:		26,3 mm
SENSITIVITY ACC. DIN IEC 268 (1W, 1m):		86 dB ± 1 dB
TOTAL WEIGHT OF UNIT:		1000 g



CHARACTERISTICS:
RUBBER EDGE, COATED DIAPHRAGM

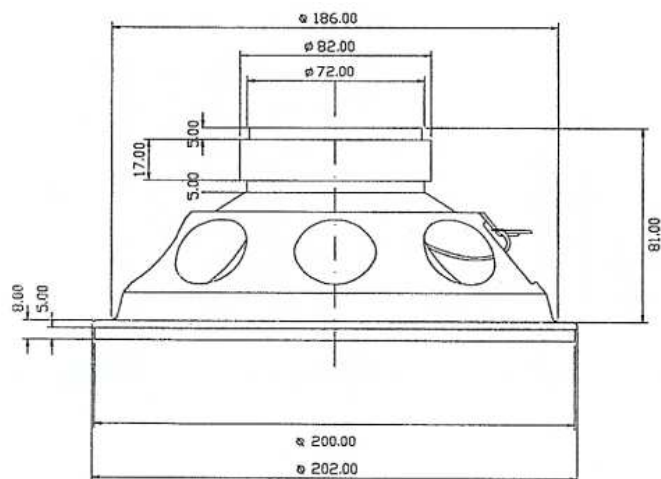

DIMENSIONS IN MM

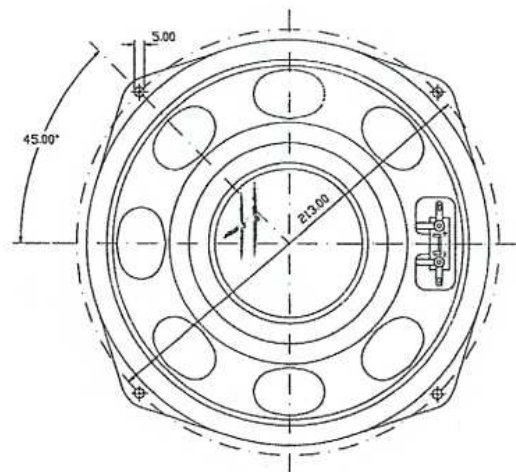

MECHANICAL TOLERANCES ACC. TO DIN 6930 (Allgemeintoleranzen, Genauigkeitsgrad G)

FREQUENCY RESPONSE ACC. DIN IEC 268 IEC BAFFLE P=1W, d=1m, SWEEPED SINE WAVE

