



Art No. WC0013

Wired/Wireless Day/Night IP Camera, H.264 Support Wireless with an optional USB WiFi dongle

Feature:

- 1/3" H.R. CCD image sensor
- Resolution: NTSC: 768 (H) x 494 (V), PAL: 752 (H) x 582 (V)
- Low-latency video streaming for sharp & clear images
- MPEG4, MJPEG and H.264 compression
- Hybrid Digital / Analog video output
- Motion detection and alarm notification via Email
- External microphone in / audio out for two-way voice communication
- Day & night functionality with built-in Infrared LEDs and Smart Light Control feature for clear and accurate image
- Supports wireless function with an optional USB wireless dongle via USB port
- 802.11b/g/n wireless standard
- Supports 3G Mobile Phone Surveillance (iPhone, BlackBerry, WinCE, J2ME & Android, Symbian Support)
- Supports multiple access levels with password
- Supports up to 10 users on-line
- Complete IP surveillance system with Central Management System (CMS) software for up to 16 cameras at the same time

Specification:

• Environment	
In/Out door use	Indoor
Day/Night	YES
• Network	
LAN Port	YES
LAN Connection	10/100 Based-T Ethernet
Wireless Features	(1) Supports 802.11n/b/g WiFi dongle (2) Ad-Hoc and infrastructure mode (3) WPS function with "Push Button Config"


Remark: For 3G Mobile Phone Surveillance, please download the mobile software installation for remote Surveillance via Mobile Phone or PDA from www.logilink.com.

* The specifications and pictures are subject to change without notice.

*All trade names referenced are the registered namework of their respective owners.



RoHS
compliant





Art No. WC0013

Wired/Wireless Day/Night IP Camera, H.264 Support Wireless with an optional USB WiFi dongle

Specification:

USB Port	For optional USB Dongle & USB flash drive
Frame Rate	NTSC: 30, PAL: 25
Number of Online Users	10
Network	With 3G Mobile Phone Surveillance
• Video / Audio	
Video Compression	H.264 / MPEG4 / MJPEG
Video Remote Control	YES
Video Adjustment	Brightness, Contrast, Saturation and Hue
Audio Compression	ULaw, 128kbps
Audio Input	Built-in Microphone, External Microphone Input
Audio Output	YES
• Camera	
Image Sensor	1/3" High Resolution CCD image Sensor
Pixels: NTSC	NTSC: 768(H) x 494(V) / PAL: 752(H) x 582(V)
Lens	f3.6mm/f4.6mm
Viewing Angle	60°
Shutter Speed	1/60 (1/50) to 1/100,000 sec.
IR LED	12 units
Min Illumination	0 Lux (10m IR ON)
Video Output	1.0 Vp-p. 75Ω
Smart light Control	YES
BLC	AUTO
White Balance	ATW



Art No. WC0013

Wired/Wireless Day/Night IP Camera, H.264 Support Wireless with an optional USB WiFi dongle

Specification:

• Software	
Supported Protocols	DDNS, DNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, UDP, ICMP, SMTP, FTP, HTTP, RTP, RTSP
Security	Multiple user access levels with password protection, WEP 64/128 bit, WPA-PSK, WPA2-PSK
Web Management	(1) The licensed software "Video Viewer" for up to 16 network cameras control simultaneously (2) AJAX management user interface for web browser
Remote Control	YES
Motion Detection	YES
Alarm and event Notification	Image upload over FTP and Email
Mobile	Supports 3GPP mobile surveillance
• Others	
General I/O	Alarm in x1
Power	DC12V, 1A
Operating Temp.	0~40°C
Humidity	85%
Minimum Web Browsing Requirements:	- Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD - 256 MB RAM - AGP graphics card, Direct Draw, 32MB RAM - Windows 7, Vista, XP, Windows 2000 Server, ME, 98, DirectX 9.0 or later - Internet Explorer 6.x or later
Dimension**	152.5(L) x 115.2(W) x 40.2(H)mm (6.00" x 4.54" x 1.58")


* The specifications are subject to change without notice.

** Dimensional tolerance: (± 5mm)

* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered namework of their respective owners.



RoHS
compliant






Art No. WC0013

Wired/Wireless Day/Night IP Camera, H.264 Support Wireless with an optional USB WiFi dongle

System Applications:

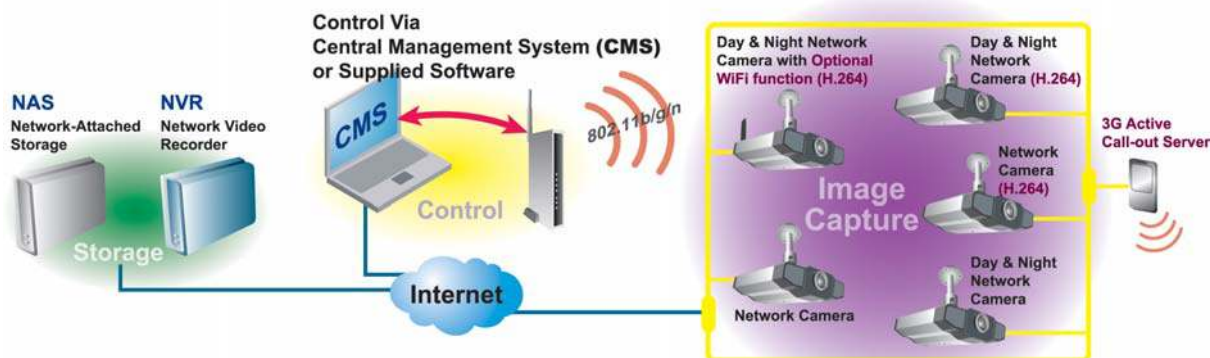

Package contents

- 1 x Network Camera
 - 1 x Optional Antenna
 - 1 x Bracket
 - 1 x RJ-45 Network Cable
 - 1 x Quick User Guide
 - 1 x CD-ROM disc for user manual & licensed software "Video Viewer"
- Optional: Power Adapter DC12 1.5A

Packaging Information:

- Packing Dimension: 194x316x96 mm
- Packing Weight: 0.9kg
- Carton Dimension: 544x430x438mm
- Carton Q'ty: 20pcs
- Carton Weight: 18.22kgs