


DIGITAL MULTIMETER

MS8233A / MS8233B / MS8233C

MS8233A

VOLTAGE AC 600V
DC 600V


CURRENT
DC 10A

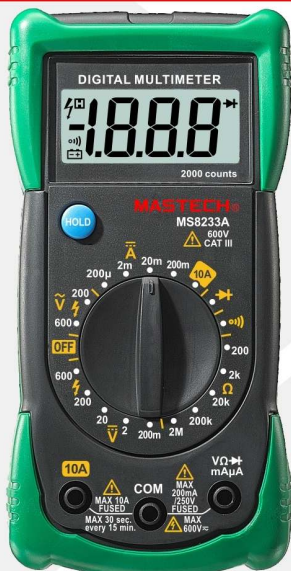

MS8233B

VOLTAGE AC 600V
DC 600V


CURRENT
DC 10A

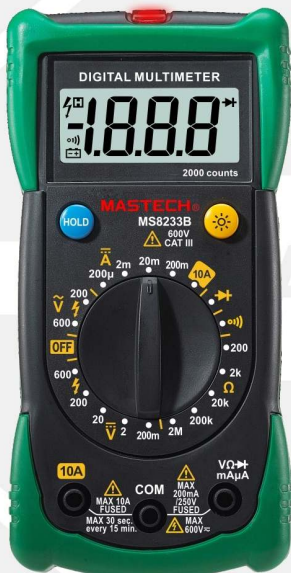

MS8233C

VOLTAGE AC 600V
DC 600V

CURRENT
DC 10A

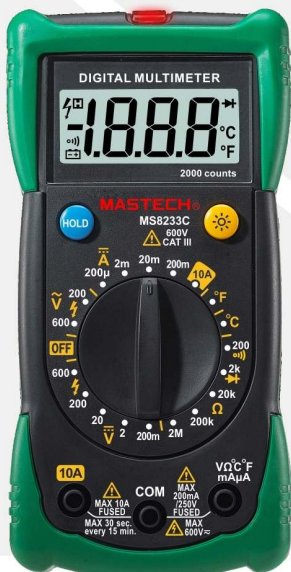

EMC
LVD



Specifications

MS8233A MS8233B MS8233C

Specifications	Range	Accuracy		
DC Voltage	200mV/2V/20V/200V	±(0.5%+3)	±(0.5%+3)	±(0.5%+3)
	600V	±(0.8%+5)	±(0.8%+5)	±(0.8%+5)
AC Voltage	200V/600V	±(1.2%+10)	±(1.2%+10)	±(1.2%+10)
DC Current	200μA/2mA/20mA/200mA	±(1.0%+3)	±(1.0%+3)	±(1.0%+3)
	10A	±(3.0%+5)	±(3.0%+5)	±(3.0%+5)
Resistance	200Ω/2KΩ/20KΩ/200KΩ/2MΩ	±(0.8%+4)	±(0.8%+4)	±(0.8%+4)
Temperature	-20°C~1000°C / -4°F~1832°F			±(2%+2)

Features

Display	counts	2000	2000	2000
NCV	Non-contact Voltage Detection			
Diode	2.7V	●	●	●
Continuity Buzzer	<50Ω	●	●	●
Data Hold		●	●	●
Display Backlight			●	●
LBD	Low Battery Display	●	●	●

General

Power Supply	1×9V/6F22 Battery				
Product Size	145mm×73mm×45mm/5.7"×2.87"×1.77"				
Product Weight	192g/0.42lb				
Model Number	MS8233A		MS8233B		MS8233C
Order Ref. Number	MS8233A	MS8233ACE10	MS8233B	MS8233BCE10	MS8233C
	CAT II 600V	CAT III 600V	CAT II 600V	CAT III 600V	CAT II 600V
Safety Rating		CE		CE	CE
	ETL		ETL		ETL

● Feature Difference

