


尺寸标注及检具说明: 尺寸标有以下符号的尺寸为重点尺寸!	序号	日期	变更内容	修改者
⊕ "卡尺"	⊕ "塞规"	⊕ "千分尺"	⊕ "高度计"	⊕ "工显或影像仪"
⊕ "齿轮啮合仪"	⊕ "齿轮检测中心"	⊕ "三次元"	⊕ "其他重检项目"	

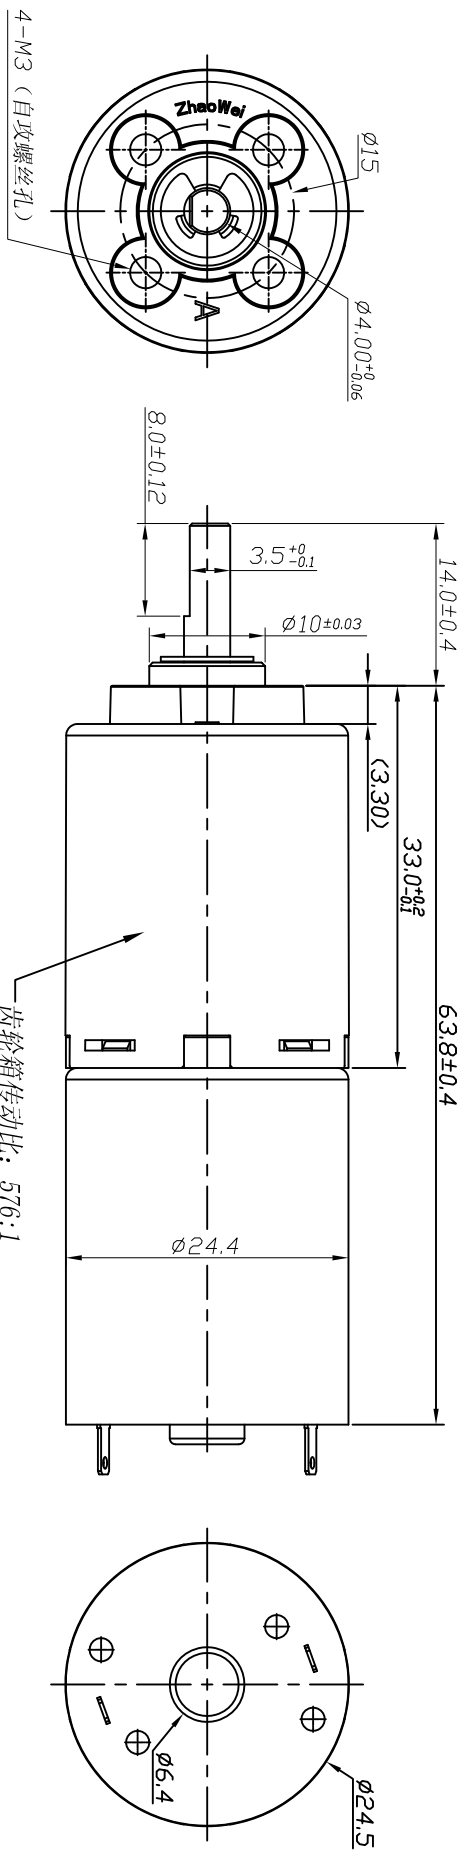

GEARBOX DATA(REF):

1	Rated Voltage	12.0 VDC	2	Idle Current	150 mA Max
3	Idle Speed	10±15% rpm	4	Rated Torque	4300g cm
5	Rated Speed	9±15% rpm	6	Rated Current	280 mA Max
7	Permit Max Torque	5.0kg.cm	8	Idle Noise	56dB(A) Max
9	Gear Ratio	576:1			

Noise Test Method: Detector with sponge to gearbox side 20cm in ambient noise under 32dB.

- TECHNICAL REQUIREMENTS:**
- 1.No defects such as crack, scratch, burr and deformation
 - 2.No abnormal noise during testing.
 - 3.RoHS compliant.

- 技术要求:**
1. 产品表面无裂纹、划痕、擦伤等缺陷。
 2. 产品测试中无异音。
 3. 环保要求: 满足RoHS指令规定。

产品名称	∅21塑胶齿轮箱	未注公差	产品代码	ZMPD024024-576
客户名称	南 奋 勇	0-3	共 1 张	版本
设计	2015-03-19	3-6	第 1 张	A
审核		6-10	比例	1:1
批准		10-18		
		18-30		
		30-50		

符合《RoHS相关禁止物质标准》

ZHAOWEI 兆威