

# YPC-Series - Valve Regulated Lead Acid Battery


## YPC26-12

SPECIFICATIONS		
Nominal voltage	12	V
20-hr rate Capacity to 10.5V at 20°C	26	Ah
10-hr rate Capacity to 10.8V at 20°C	23.3	Ah
DIMENSIONS		
Length	166.5 (±1)	mm
Width	175 (±1)	mm
Height	125 (±2)	mm
(height over terminals)	N/A	mm
Mass (typical)	8.57	kg
TERMINAL TYPE		
Female threaded terminal	M5	mm
Torque	3	Nm
OPERATING TEMPERATURE RANGE		
Storage (in fully charged condition)	-20°C to +60°C	
Charge	-15°C to +50°C	
Discharge	-20°C to +60°C	
STORAGE		
Capacity loss per month at 20°C (approx)	3	%
CASE MATERIAL		
Standard Option	ABS (UL.94:HB)	
Flame retardant option (FR)	ABS (UL94:V0)	
CHARGE VOLTAGE		
Float charge voltage at 20°C	13.65 (±1%)	V
	2.275 (±1%)	V/cell
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C
Cyclic (or Boost) charge at 20°C	14.5 (±3%)	V
	2.42 (±3%)	V/cell
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C
CHARGE CURRENT		
Float charge current limit	No limit	A
Cyclic (or Boost) charge current limit	6.50	A
MAXIMUM DISCHARGE CURRENT		
1 second	360	A
1 minute	260	A
CYCLIC LIFE DATA		
100% DOD down to 80% capacity	300	cycles
75% DOD down to 80% capacity	500	cycles
50% DOD down to 80% capacity	600	cycles
25% DOD down to 80% capacity	1400	cycles
IMPEDANCE		
Measured at 1 kHz	13	m
PERFORMANCE & CHARACTERISTICS		
Refer to the technical short form	YPC	
DESIGN LIFE		
EUROBAT Classification: Standard Commercial	3 to 5	years
SAFETY		
<b>Installation</b>		
Can be installed and operated in any orientation except permanently inverted		
<b>Handles</b>		
Batteries must not be left permanently suspended by their handles (where fitted)		
<b>Vent valves</b>		
Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.		
<b>Gas Release</b>		
VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container		
<b>Recycling</b>		
YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations		

# Data Sheet



## LAYOUT

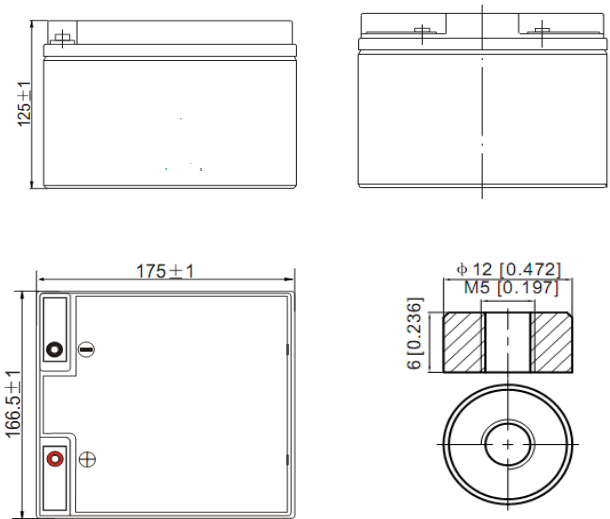

## 3RD PARTY CERTIFICATIONS

ISO 9001 - Quality Management Systems  
ISO 14001 - Environmental Management Systems  
EN 18001 - OHSAS Management Systems



UNDERWRITERS LABORATORIES Inc.

## STANDARDS

IEC61056  
IEC60895-21/22



ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE  
Issue No.: V.5 / Issue Date: Mar 2012



YUASA BATTERY SALES UK LTD.  
Unit 13, Hunts Rise  
South Marston Industrial Estate  
Swindon  
SN3 4TG  
UK